


# Processing Instruction Wakol Sealing System



Mark corners, apply WAKOL MS 550 PVC and Rubber Adhesive, insert WAKOL AS 153 Sealing Corners, inner and grind..

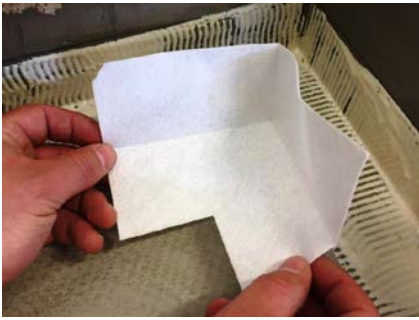

Mark approx. 5-6 cm high on the wall.

Allow an approx. 5 cm overlap in the area of the corners, apply WAKOL MS 550 PVC and Rubber Adhesive to the wall and floor, insert WAKOL AS 152 Sealing Tape and rub down.



Cut WAKOL AS 151 Sealing Sheet to size.

Apply WAKOL MS 550 PVC and Rubber Adhesive and wait at least 20 minutes.

Insert sheet and rub down with the cork board.



In the edge area adhere to the existing sealing tape.

Adjoin seams of the sheets.



Coat the marked area on the left and right of the joint with WAKOL MS 550 PVC and Rubber Adhesive and wait at least 20 minutes.

Insert WAKOL AS 152 Sealing Tape and rub down.

# WAKOL SEALING SYSTEM

## WAKOL AS 151 Sealing Sheet

**Area of application:**

System component for waterproofing wet areas in domestic area (Class W1 and W2) under parquet and elastic flooring.

**Consumption:**

one after the other corresponding to the room size

**Storage Information:**

store roll upright

**Base:**

polypropylene fleece

**Available container:**

595602 - Roll 20 m, 1 m wide, 0,5 mm thick

## WAKOL AS 152 Sealing Tape

**Area of application:**

System component for waterproofing wet areas in domestic area (Class W1 and W2) under parquet and elastic flooring.

**Consumption:**

one after the other corresponding to the room size

**Storage Information:**

not sensitive to frost


**Base:**

polypropylene fleece

**Available container:**

595603 - Roll 50 m, 120 mm wide

## WAKOL AS 153 Sealing Corners, inner

**Area of application:**

System component for waterproofing wet areas in domestic area (Class W1 and W2) under parquet and elastic flooring.

**Consumption:**

1 pc. per inner corner

**Storage Information:**

not sensitive to frost

**Base:**

polypropylene fleece

**Available container:**

595604 - 5 pieces - 119x119x60mm

## WAKOL AS 154 Sealing Corners, outer

**Area of application:**

System component for waterproofing wet areas in domestic area (Class W1 and W2) under parquet and elastic flooring.

**Consumption:**

1 pc. per outer corner

**Storage Information:**

not sensitive to frost

**Base:**

polypropylene fleece

**Available container:**

595605 - 5 pieces - 115x115x60mm